


KABELZUSCHNITT
STRIPPING DIMENSION

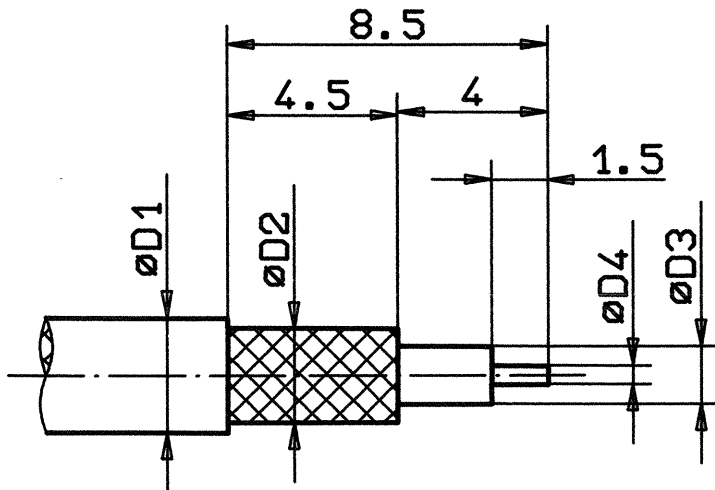

GR.	FUER KABEL / FOR CABLE TYP / TYPE	ØD1 MAX.	ØD2 MAX.	ØD3 MAX.	ØD4 MAX.	ANSCHLUSS / CRIMP AREA				CRIMP- SECHS- KANT CRIMP HEX
						ØD5	ØD6	ØD7	ØD8	
1	RG178B/U, RG196A/U	2.1	1.38	0.91	0.3	1.05	1.7	2.25	3.2	2.67
2	RG188A/U, RG316U	2.8	2.24	1.67	0.51	1.7	2.6	3.2	3.8	3.25
5	RG316U-d	3.05	2.5	1.55	0.51	1.7	2.6	3.6	4.2	3.65

IME CONNECTOR SYSTEMS GMBH

ALLGEMEINTOL.
ISO 2768
mH

Maßstab 5:1

	Datum	Name
Bearb.	09.06.87	Baer.
Gepr.		
Norm		

WINKELBUCHSE

33634

025.93.2420.0" a

Blatt

B1.

329/96 a Uebersetzt 06.08.96 Schuh

Nr. Zuet Aenderung Datum Name