


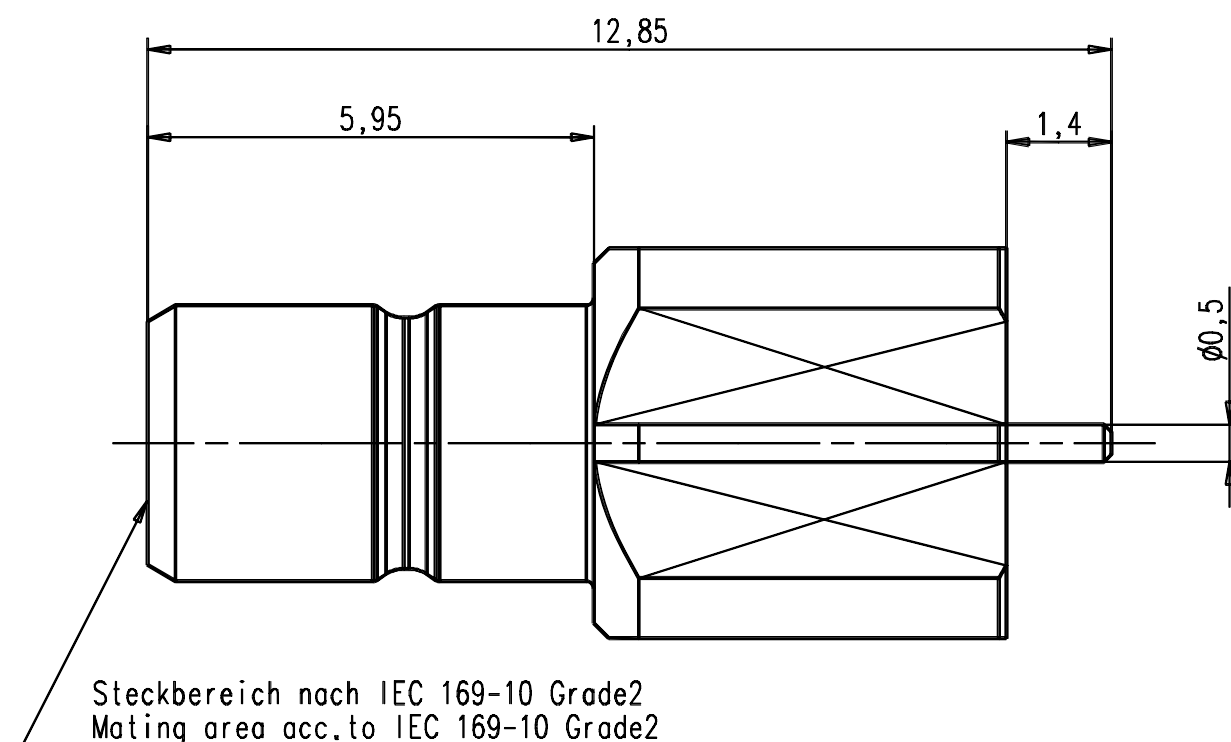


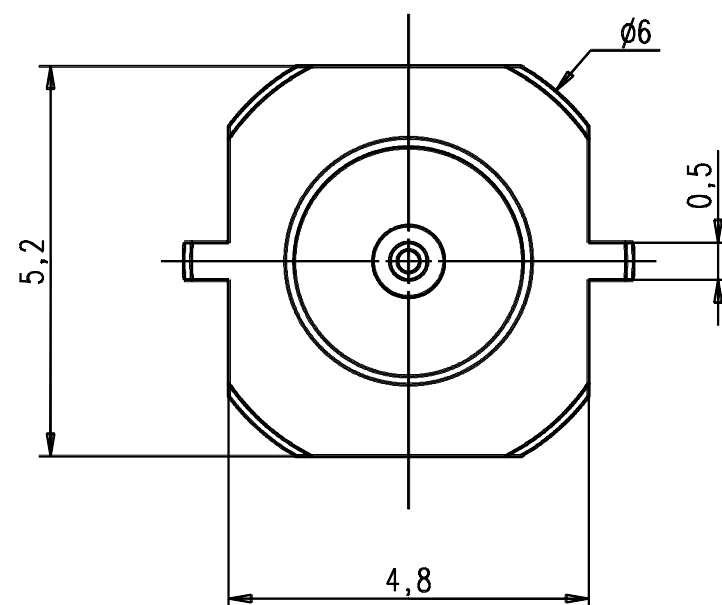

SMD-Lötflächen / Solderpad layout

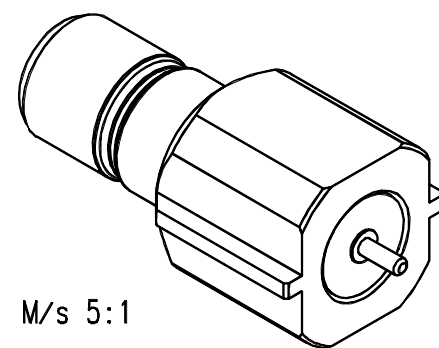

M/s 5:1

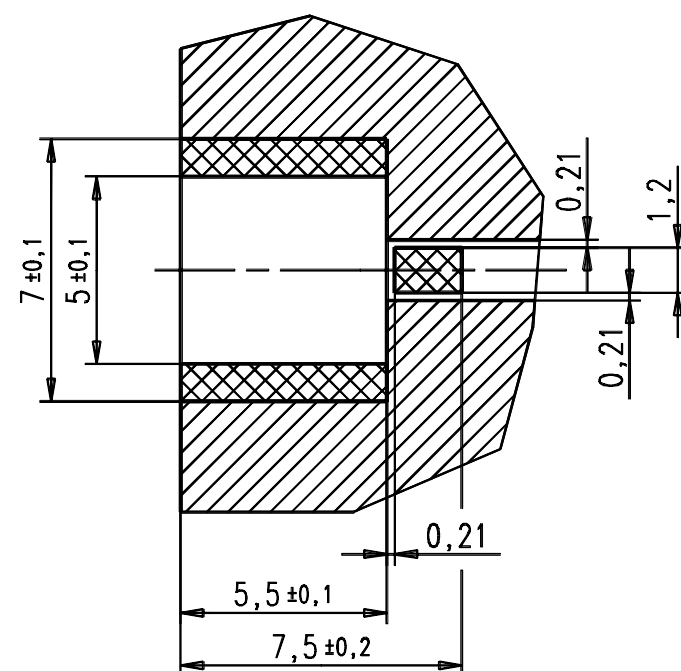

Verpackung:

Blistergurt: AGK-3818
 Stk/Gurt : 1000
 Stk/m : 83,3
 Vorlauf : 0,3 m
 Nachlauf : 0,4 m
 Gurtlänge : ca. 12,7 m
 Spulenø : 330 mm

Packaging:

Tape and reel: AGK-3818
 parts/reel : 1000
 parts/m : 83,3
 forward run : 0,3 m
 after running: 0,4 m
 lenght : appr. 12,7 m
 reeldiameter : 330 mm

IMS CONNECTOR SYSTEMS					general tolerance ISO 2768 mH		scale: 5:1	
							Assembly instruction: Stripping dimension:	
					date	name	SMB-Stecker SMT-Type SMB-Plug SMT-Typ	
				generate	29.07.03	Schuh		
				checked				
				Norm				
				42059				
EC_044_06	b	Solderpad	08.03.06	I.S.			3703.11.1010.00'	
480/03	a	Tape and reel	19.11.03	Glatz				
nr.	rev.	alteration	date	name			Rev. b	