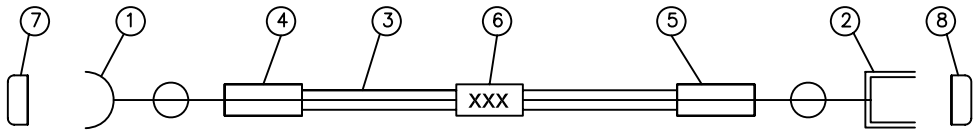

Pos.	pcs	Description	Type–No./Contents	Remark
1	1	Connector		I–PEX number: 20351–112R–37
2	1	Connector		I–PEX number: 20351–112R–37
3	1	Cable		look at table (right)
4				
5				
6				
7				
8				

	No. of cable		Pcs.	

Pos.	pcs	Cable –No	customer part–no.	Cable–typ	cable color	Total length (L)
3	1	K–6403–01	6506	OD=ø1.37	black	$L=192^{+0}_{-2}$mm
	1					
	1					
	1					

Stripping dimension	Stripping dimension	Remarks
POS. 1	POS. 2	Pos. 1 Outer: Inner:
		Pos. 2 Outer: Inner:

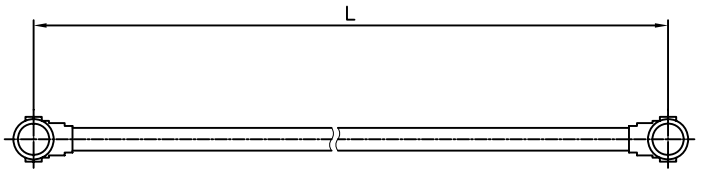

Frequency range:

VSWR:

Insertion loss:

Operation Temperature Range:

Impedance:

Proof Voltage:

IMS CONNECTOR SYSTEMS

General Tolerance
AA–CS–12

	date	name
generate	02.02.09	Dony. Ni
checked		
norm		

nr.	rev.	alteration	date	name

scale:

Customer:
Customer drawing no:

RF Cable Assembly

K–6403–xx

Rev. A