


Pos.	pcs	Description	Type-No./Contents	Remark
①	1	Cable mount plug	2406.MC.1310.043	
②	1	Connector		I-PEX number: 20351-112R-37
③	1	Cable		look at table (right)
④	1	Heat shrink	Ø3.2, Black (1135563) ②	L=12.7mm
⑤	1	Heat shrink	Ø3.2, Black (1135563) ②	L=12.7mm
⑥				
⑦	1	Fair-Rite	2643001501	
⑧	1	Fair-Rite	2643001501	

No. of cable	Pos.

Stripping dimension	Stripping dimension	Remarks
		Pos. 1 Outer: crimp Q2.67 Inner: solder Pos. 2 Outer: Inner:
		Frequency range:
		VSWR:
		Insertion loss:
		Operation Temperature Range:
		Impedance:
		Proof Voltage:

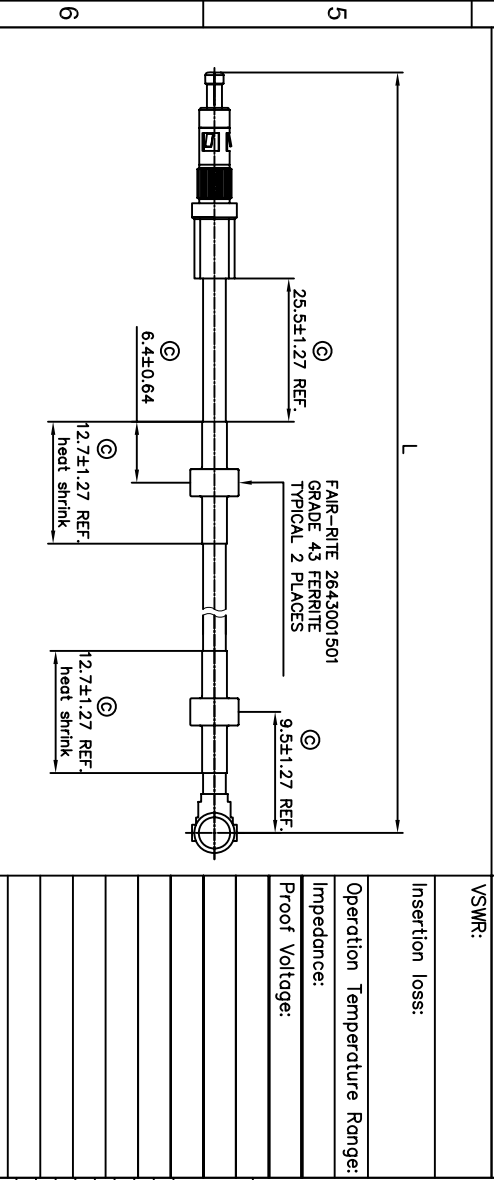

Pos.	pcs	Cable -No	customer part-no.	Cable-tyr	cable color	Cut length (l)	Total length (L)
③	1	K-6410-01	6561	OD=Ø1.37	black	l=279.1±0.6mm	L=288.9±2mm
	1						
	1						

design	rev.	update	date	name
C		update dimension	16.07.10	Dony
B		update heat shrink	05.07.10	Dony
A		alteration		



General Tolerance  
AA-CS-12

Customer:  
Customer drawing no:

RF Cable Assembly

K-6410-XX

Rev. C

A B C D E F G H